

High and low speed travel motor


X-type frame


Comes standard with thumb clip and quick-change


PARAMETER





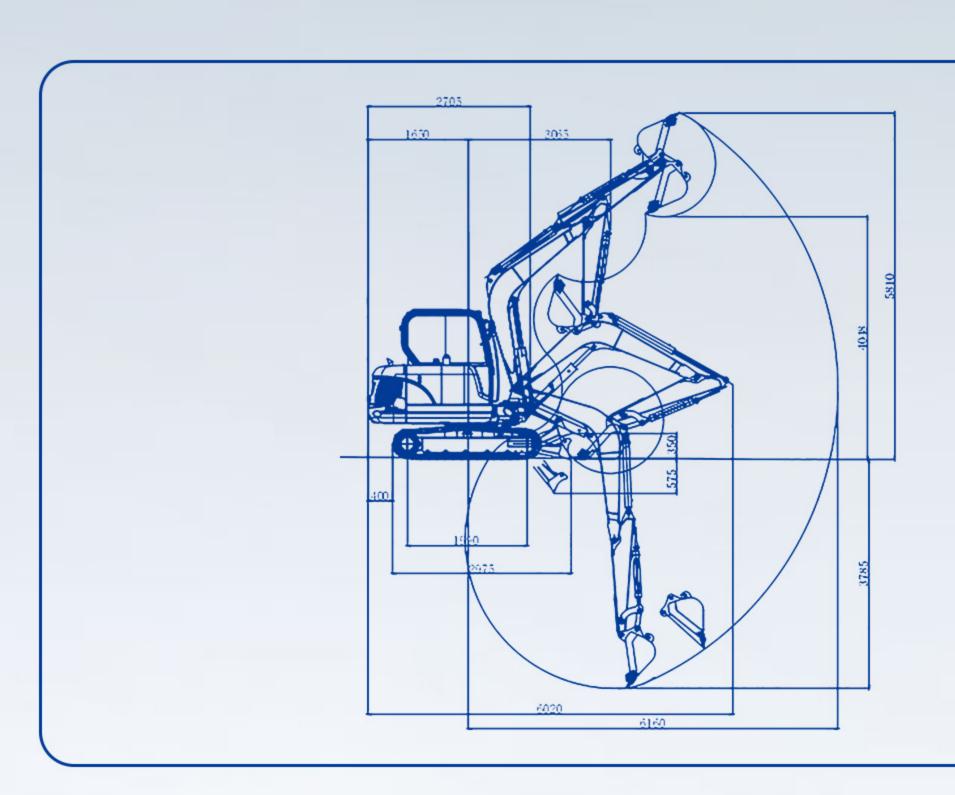

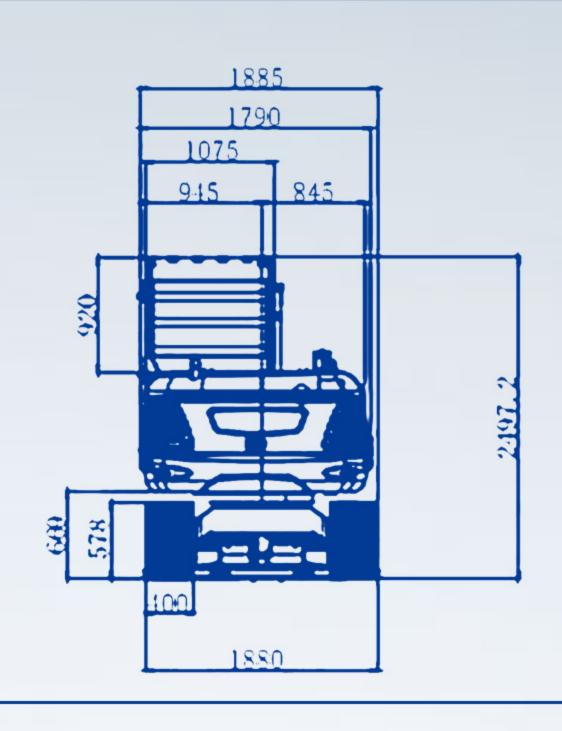

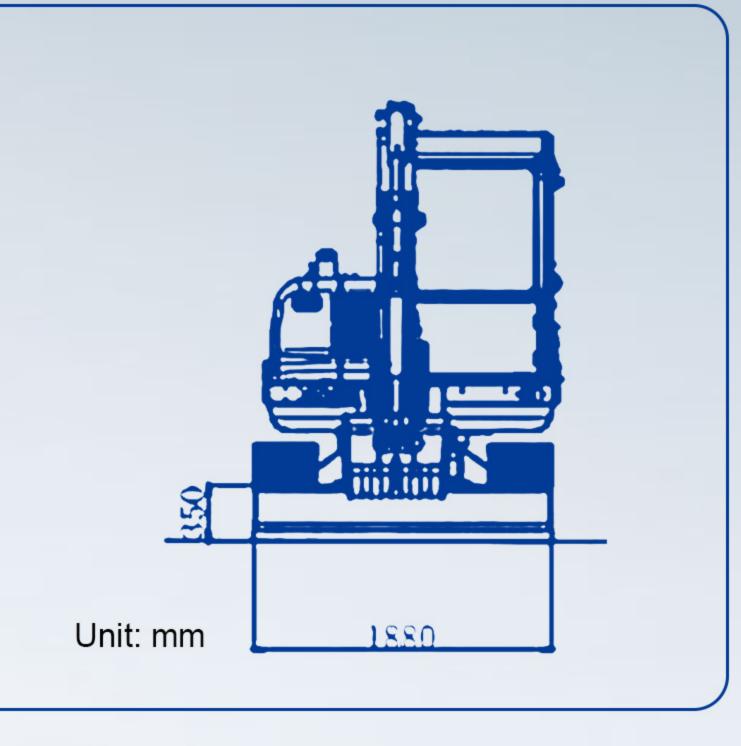

Basic parameters	Machine working weight	12705lb	5775kg
	Bucket capacity	6.18ft ³	0.175m ³
	Travel speed low/high speed	0-1.5/0-2.4mph	0-2.4/0-3.8km/h
	Gradeability	35%	35%
	Ground pressure	5.1psi	35.4kpa
	Maximum digging force	7194lbf	32KN
	Maximum digging radius	242.5in	6160mm
	Maximum digging depth	149in	3785mm
	Maximum digging height	228.7in	5810mm
	Maximum unloading height	160.6in	4080mm
	Maximum deflection angle	_	-
	Track extension range	_	_
Engine	Engine brand	Kubota	Kubota
	Engine model	V2607	V2607
	Maximum horsepower	47.6hp	48.3ps
	Maximum power	35.5kw	35.5kw
	Maximum speed	2200rpm	2200rpm
	Displacement	0.69gal	2.615L
	Number of cylinders	4	4
	Cooling method	Water-cooled	Water-cooled
	Engine oil change amount	1.6gal	6.1L
	Fuel form	Diesel	Diesel
	Fuel grade	0/-10	0/-10
	Theoretical fuel consumption	9.72L/h	9.72L/h

Body	Transport length	230.3in	5850mm
	Transport width	78.7in	2000mm
	Transport height	101.6in	2580mm
	Counterweight ground clearance	e 26.3in	669mm
	Bucket width	23.6in	600mm
	Boom length	118.16in	3000mm
	Arm length	63in	1600mm
	Bulldozer blade width	74in	1880mm
Hydraulic system	Maximum set pressure	3626psi	25MPa
	Travel hydraulic motor type	TM07	TM07
	Travel motor brand	ZHTE	ZHTE
	Motor displacement	22-44ml/r	22-44ml/r
	Slewing hydraulic motor type	ZHTE DH80	ZHTE DH80
	Displacement	43.2ml/r	43.2ml/r
	Main pump type/model Loa	d sensitive variable	e piston pump/68
	Main pump brand	HYTEK	HYTEK
	Main pump maximum flow	39.5GPM	149.6L/min
	Multi-way valve	8-way hydrauli	c multi-way valve
	Multi-way valve brand	HYTEK	HYTEK
	Rated set pressure	3263psi	22.5MPa

SCENARIO APPLICATION

The RIPPA 5.7-ton excavator has excellent operating efficiency and adaptability, and is widely used in various construction scenarios such as municipal engineering, road construction, site leveling, farmland water conservancy, and mining. It has strong power and stable structure. It is capable of large-load earthwork operations and has a certain degree of flexibility. It is suitable for medium-sized construction projects and is an important construction force connecting light and heavy equipment.

Dealer / Name:

WhatsApp / Phone:

Address:

Email: